

PARTS LIST

- ① BODY
- ② LEVER
- ③ LEVER BOLT & BUSHING
- ④ PROTECTIVE RUBBER COVER
- ⑤ THRUST COLLAR
- ⑥ END ADAPTOR
- * ⑦ REPLACEABLE BARREL ASSEMBLY

MODEL NUMBER: S-151


COVER COLOR:

- 4B Black
- 4BN Black Nitrile (oil resistant)
- 4BL Blue
- 4G Gray
- 4R Red
- 4W White

MAXIMUM TEMPERATURE: 200°F

MAXIMUM PRESSURE: 150 psi

BRONZE WEIGHT: 3 lbs.

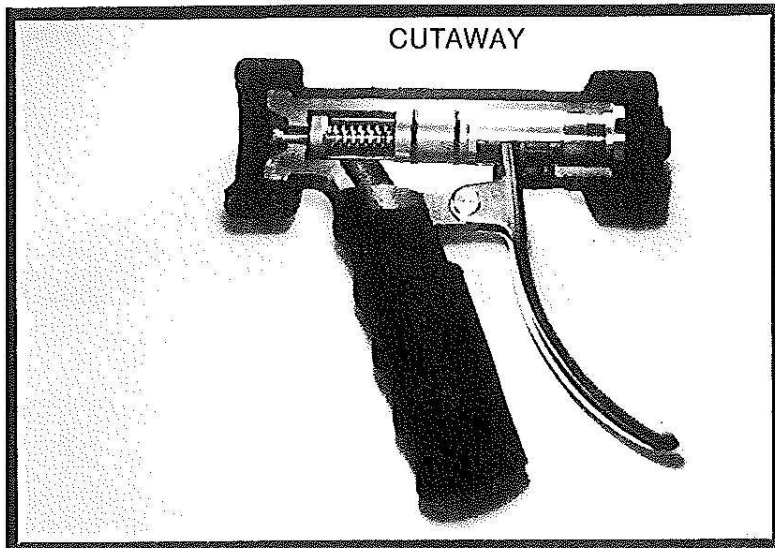

ORDERING HOSE ADAPTORS

Specify Hose I.D. Swivel hose adaptor sizes: ½", ⅝", ¾" (Barb Only). Also available ¾" female garden hose fitting.

* Contains all internal working parts, and is normally all that is required to rebuild nozzle.

INSTRUCTIONS FOR SERVICING

- 1). **Remove rubber cover** by slipping cover off the back, and then pulling forward over the front of nozzle. If replacing, soak new cover in warm soapy water (liquid detergent).
- 2). **Remove lever bolt & bushing** (3) then pull out lever (2).
- 3). **Unscrew** end adaptor (6), then remove barrel assembly (7) with thrust collar (5).
- 4). **To insert** new barrel assembly, simply reverse procedure.

HOT AND COLD WATER USE ONLY. NOT SUITABLE FOR USE ON STEAM.